

D 20MM

NON-ROTATING



0,1µm



USB HID CONNECTION



KEYBOARD MODE LINUX



FREE SOFTWARE




WIRELESS UP TO 100M




D 35MM

NON-ROTATING

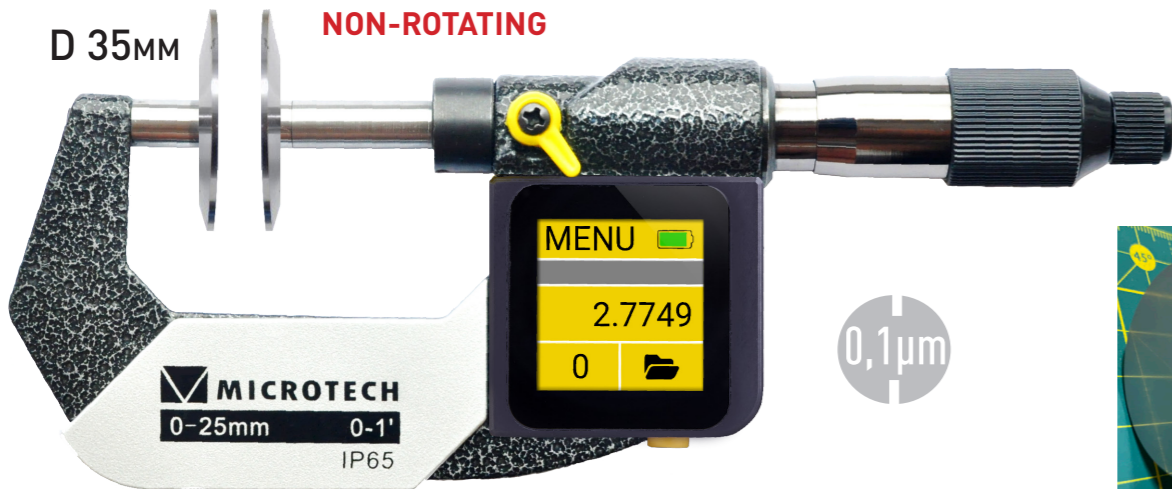


0,1µm



<b>MENU</b>			<b>MENU</b>	<b>MENU</b>			
1.5337			-1.7210	7.2241	AX+BX+C	+000 sec.	DAY MONTH YEAR 01 01 2020
0			0	0	Set Argv	<b>RESET</b>	<b>CHANGE</b>
COLOR DISPLAY	MENU	ROTATING DISPLAY	GO/NOGO	MAX/MIN	FORMULA	TIMER	CALIBRATION DATE
Resolution	Stat All	Stat All	Stat All Delete or Send?	Statistic	Temp.comp.	0: 0.8970	
X.0000	1: 0.0000	2: 1.2334	Del Send	MAX: +26.999	Glass, Quartz Solid alloys, Mo	C: 0.8920	
Millimeters	3: 1.2337	4: 1.2333	1.2341	AVG: +5.3213	+00.00	<b>RESET</b>	
RESOLUTION	MEMORY 2000 val.	FOLDERS SYSTEM	MEMORY EXPORT	STATISTIC	TEMP. COMPENSATION	LINEAR CORRECTION	FIRMWARE UPDATE

OPTIONAL ACCESORIES



STANDARD MDS app

ACCESORIES FOR DATA TRANSFER



DOWNLOAD APP



MADE IN EUROPE

Item No	Range		Resolution	Accuracy	Micrometer head	Disk anvil	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Rotating disp	Energy saving	Menu	Recharge batt	PIN lock	Values	Folders	Statistic	Wireless	USB HID	Color Display	Touchscreen	Proof
	mm	inch	mm	µm																							
110780258	0-25	0-1"	0,0001	±3	Friction non-rotating	D 20	•	•	•	•	•	•	•	•	•	•	•	•	•	2000	•	•	•	•	1,54"	•	IP65
110780508	25-50	1-2"		±3			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110780758	50-75	2-3"		±4			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110781008	75-100	3-4"		±4			•	•	•	•	•	•	•	•	•	•	•	•	•		•						

Item No	Range		Resolution	Accuracy	Micrometer head	Disk anvil	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Rotating disp	Energy saving	Menu	Recharge batt	PIN lock	Values	Folders	Statistic	Wireless	USB HID	Color Display	Touchscreen	Proof
	mm	inch	mm	µm																							
110780257	0-25	0-1"	0,0001	±4	Friction non-rotating 25mm range	D35	•	•	•	•	•	•	•	•	•	•	•	•	•	2000	•	•	•	•	1,54"	•	IP65
110780507	25-50	1-2"		±4			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110780757	50-75	2-3"		±5			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110781007	75-100	3-4"		±5			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110781257	100-125	4-5"		±7			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110781507	125-150	5-6"		±7			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110781757	150-175	6-7"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110782007	175-200	7-8"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110782257	200-225	8-9"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110782507	225-250	9-10"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110782757	250-275	10-11"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110783007	275-300	11-12"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110783257	300-325	12-13"		±9			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110783507	325-350	13-14"		±9			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110783757	350-375	14-15"		±9			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110784007	375-400	15-16"		±9			•	•	•	•	•	•	•	•	•	•	•	•	•		•	•					
110784257	400-425	16-17"	±10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
110784507	425-450	17-18"	±10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
110784757	450-475	18-19"	±10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
110785007	475-500	19-20"	±10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									

Item No	Range		Resolution	Accuracy	Micrometer head	Disk anvil	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Rotating disp	Energy saving	Menu	Recharge batt	PIN lock	Values	Folders	Statistic	Wireless	USB HID	Color Display	Touchscreen	Proof
	mm	inch	mm	µm																							
110780307	200-300	8-12"	0,0001	±10	Friction non-rotating 25mm range	D35	•	•	•	•	•	•	•	•	•	•	•	•	•	2000	•	•	•	•	1,54"	•	IP65
110780407	300-400	12-16"		±10			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110780507	400-500	16-20"		±12			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110781607	500-600	20-24"		±12			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110781707	600-700	24-28"		±14			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110781807	700-800	28-32"		±14			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110781907	800-900	32-36"		±15			•	•	•	•	•	•	•	•	•	•	•	•	•		•						
110782917	900-1000	36-40"		±15			•	•	•	•	•	•	•	•	•	•	•	•	•		•						

MADE IN EUROPE