




ISO 17025
CALIBRATION

Item No	Range	Resolution	Accuracy
	mm	mm	μm
132005030	50-300	0,01	±8
132005060	50-600		±15
132005100	50-1000		±20
132005150	50-1500		±25
132005200	1000-2000		±30
132005300	1000-3000		±50

DIGITAL INSIDE MICROMETER IP65



Item No	Range		Resolution	Accuracy	Extension rods	Protection
	mm	inch				
133800152	125-1500	6-60"	0,001	±25	25, 50 (2pcs), 100 (2pcs), 200, 400 (2pcs)	IP65
133800202	125-2000	6-80"		±30	25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (3pcs)	IP65
133800302	125-3000	6-120"		±40	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (5pcs)	IP65
133800402	125-4000	6-160"		±50	25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (8pcs)	IP65

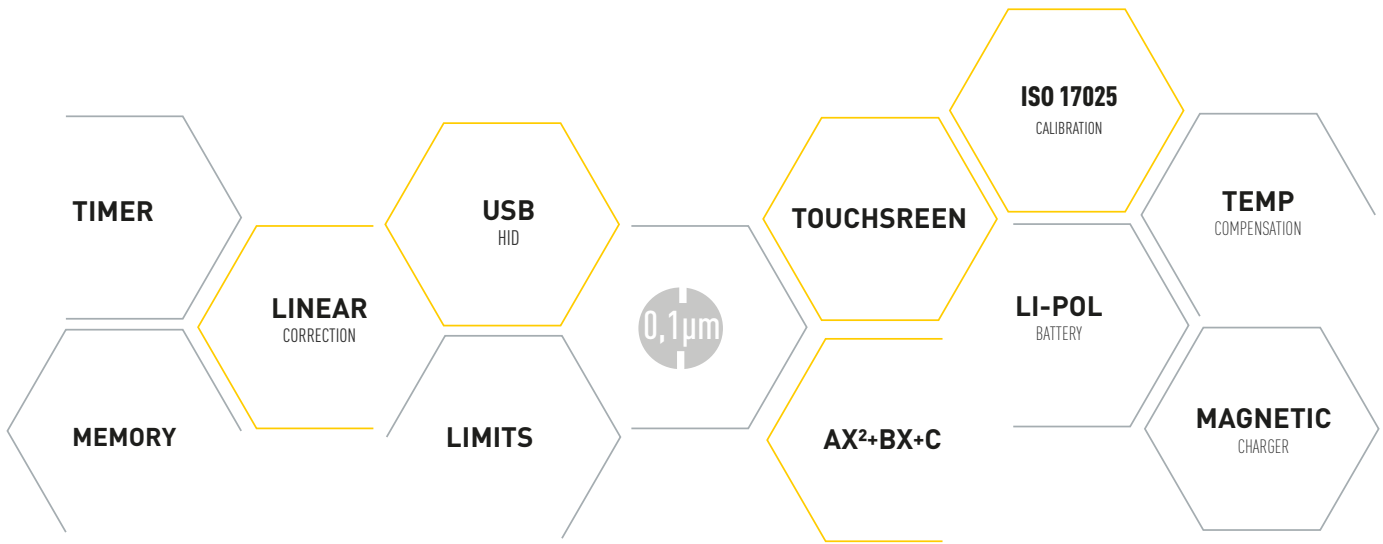

Item No	Range		Resolution	Accuracy	Extension rods	Protection	Display	Data output
	mm	inch						
133800100	125-1000	6-60"	0,0001	±15	25, 50 (2pcs), 100 (2pcs), 200, 400 (2pcs)	IP65	Color 1.5" Touch-screen	WIRELESS+USB
133800200	125-2000	6-80"		±20	25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (3pcs)	IP65		
133800300	125-3000	6-120"		±30	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (5pcs)	IP65		
133800400	125-4000	6-160"		±40	25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (8pcs)	IP65		

OPTIONAL ACCESORIES



FUNCTIONS

- LIMITS (Go/NoGo)
- PEAK VALUES (Max/Min)
- MEMORY, WITH STATISTICS
- TIMER
- FORMULA AX^2+BX+C
- MM/INCH
- PRESET
- CALIBRATION DATE CONTROL
- PIN LOCK

- LINEAR CORRECTION
- TEMPERATURE COMPENSATION
- RECHARGEABLE LI-POL BATTERY
- MAGNETIC CHARGING SOCKET

- WIRELESS** APPS FOR WINDOWS, ANDROID, iOS
DATA TRANSFER TO MDS
- USB** HID DATA TRANSFER DIRECT TO WINDOWS, MACOS, ANDROID, LINUX APP'S