



- Industry 4.0 adopted sub-micron DISK micrometer with computerized MICS system for measuring Gear tooth width
- **NON-rotating spindle** with Disk anvils D 20 and 35mm (custom Disk anvils up to 60mm for request)
- **Functions:** On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))

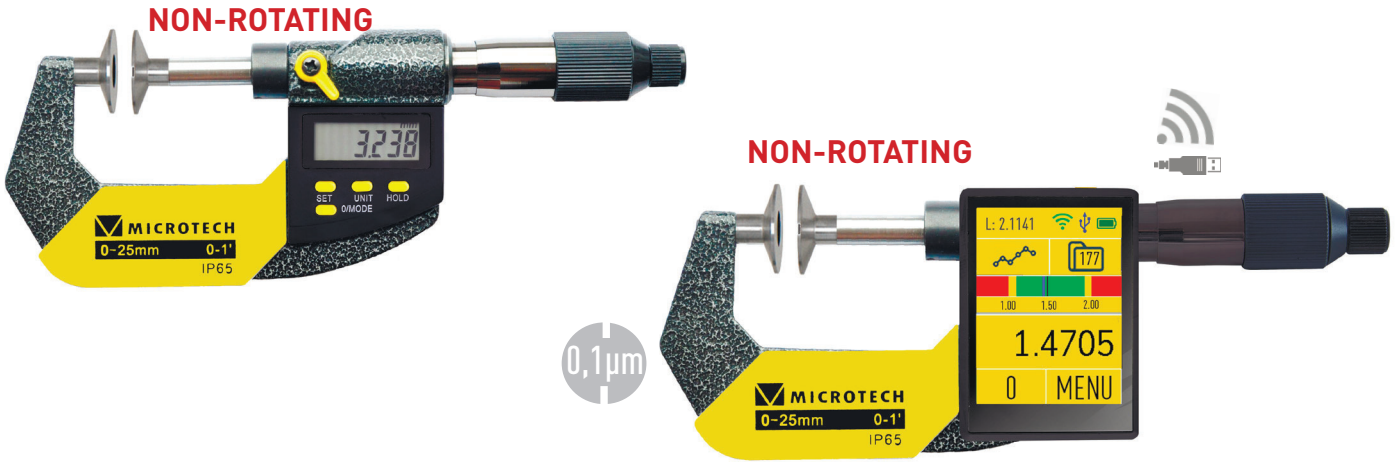

Item No	Range		Reso- lution	Accu- racy	Disk	NON-ROTATING	Analog scale	Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB	Display				
	mm	inch																				mm	μm	mm	
110780251	0-25	0-1"	0,001	±4	D 20	•																			
110780501	25-50	1-2"		±4		•																			
110780751	50-75	2-3"		±5		•																			
110781001	75-100	3-4"		±5		•																			
COMPUTERIZED MICROMETER DISK D 20mm																									
110780258	0-25	0-1"	0,0001	±3	D 20	•	•	•	•	•	•	•	•	•	•	•	•	•							
110780508	25-50	1-2"		±3		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110780758	50-75	2-3"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110781008	75-100	3-4"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
COMPUTERIZED MICROMETER DISK D 35mm																									
110780257	0-25	0-1"	0,0001	±4	D 35	•	•	•	•	•	•	•	•	•	•	•	•	•							
110780507	25-50	1-2"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110780757	50-75	2-3"		±5		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110781007	75-100	3-4"		±5		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110781257	100-125	4-5"		±7		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110781507	125-150	5-6"		±7		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110781757	150-175	6-7"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110782007	175-200	7-8"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110782257	200-225	8-9"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110782507	225-250	9-10"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110782757	250-275	10-11"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110783007	275-300	11-12"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110783257	300-325	12-13"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110783507	325-350	13-14"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110783757	350-375	14-15"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110784007	375-400	15-16"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110784257	400-425	16-17"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110784507	425-450	17-18"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110784757	450-475	18-19"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•						
110785007	475-500	19-20"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•						



Folders / 2000 val
Long range / HID
USB HID / Update
Touchscreen 2.4"