
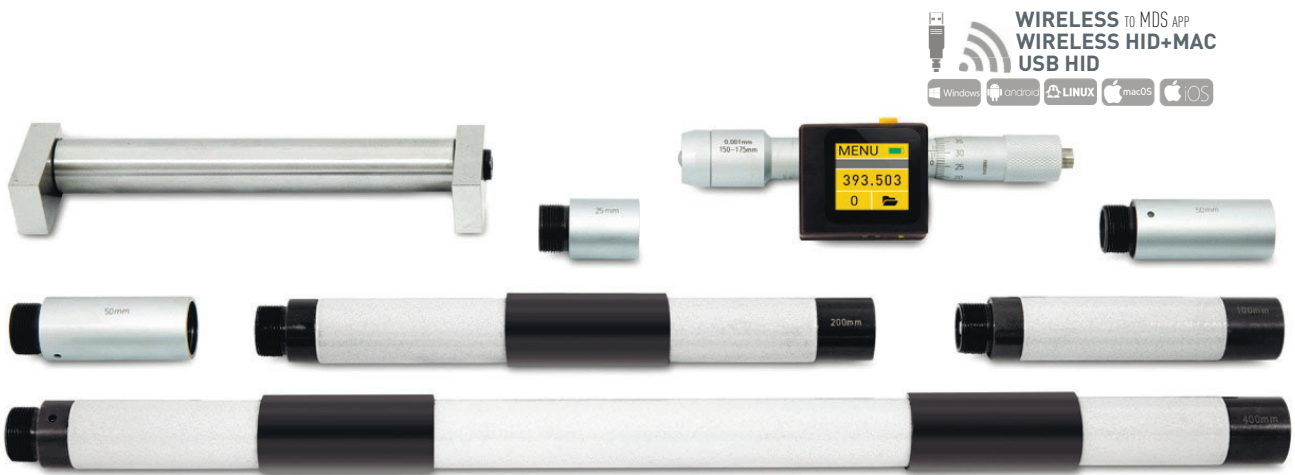


- Tubular Inside micrometers with range up to 6m
- Digital IP65 or Computerized **MICS** indication system Modification with **Long range** Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- **Calibration** certificate included (ISO17025 (Ilac MRA))



| Item No | Range | | Reso- lution | Accu- racy | Tube D | Extension rods | Proof | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Recharge | Memory | WIRELESS | USB | Display | | |
|---|----------|--------|-----------------|---------------|--|--|-------|--------|---------|---------|---------|-------|-----------|-------------|-------------|----------|--------|--------------------|------------------|------------------|-------------------|---|
| | mm | inch | mm | µm | mm | mm | | | | | | | | | | | | | | | | |
| DIGITAL INSIDE MICROMETER IP65 | | | | | | | | | | | | | | | | | | | | | | |
| 133800102 | 125-1000 | 5-40" | 0,001 | ±20 | 22 | 25, 50 (2pcs), 100, 200, 400 | IP65 | • | | | | | | | | | | | | | | |
| 133800152 | 125-1500 | 5-60" | | ±25 | | 25, 50 (2pcs), 100 (2pcs), 200, 400 (2pcs) | | • | | | | | | | | | | | | | | |
| 133800202 | 125-2100 | 5-84" | | ±30 | | 25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (3pcs) | | • | | | | | | | | | | | | | | |
| 133800302 | 125-3000 | 5-120" | | ±40 | 25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (5pcs) | • | | | | | | | | | | | | | | | | |
| 133800402 | 125-4000 | 5-160" | | ±50 | 25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (8pcs) | • | | | | | | | | | | | | | | | | |
| 133800502 | 125-5000 | 5-200" | | ±70 | 25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (10pcs) | • | | | | | | | | | | | | | | | | |
| 133800602 | 125-6000 | 5-240" | | ±80 | 25, 50 (2pcs), 100 (2pcs), 200 (4pcs), 400 (12pcs) | • | | | | | | | | | | | | | | | | |
| SUB-MICRON COMPUTERIZED TUBULAR INSIDE MICROMETER IP65 | | | | | | | | | | | | | | | | | | | | | | |
| 133800100 | 125-1000 | 5-40" | 0,0001 | ±15 | 22 | 25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (10pcs) | IP65 | • | • | • | • | • | • | • | • | • | • | Folders / 2000 val | Long range / HID | USB HID / Update | Touchscreen 1.54" | |
| 133800150 | 125-1500 | 5-60" | | ±15 | | 25, 50 (2pcs), 100 (2pcs), 200 (4pcs), 400 (12pcs) | | • | • | • | • | • | • | • | • | • | • | | | | | • |
| 133800200 | 125-2100 | 5-84" | | ±20 | | 25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (3pcs) | | • | • | • | • | • | • | • | • | • | • | | | | | • |
| 133800300 | 125-3000 | 5-120" | | ±30 | 25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (5pcs) | • | | • | • | • | • | • | • | • | • | • | • | | | | | |
| 133800400 | 125-4000 | 5-160" | | ±40 | 25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (8pcs) | • | | • | • | • | • | • | • | • | • | • | • | | | | | |
| 133800500 | 125-5000 | 5-200" | | ±50 | 25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (10pcs) | • | | • | • | • | • | • | • | • | • | • | • | | | | | |
| 133800600 | 125-6000 | 5-240" | | ±60 | 25, 50 (2pcs), 100 (2pcs), 200 (4pcs), 400 (12pcs) | • | | • | • | • | • | • | • | • | • | • | • | | | | | |