



Item No	Range	Depth	Reso- lution	Accuracy
	mm	mm	mm	µm
132010100	6-10	60	0.01	±8
132018100	10-18	110		±8
132050100	18-50	130		±12
132050111		500		±12
132050122		1000		±12
132050144		2000		±12
132160100	50-160	150		±15
132160111		500		±15
132160122		1000		±15
132160144		2000		±15
132250100	160-250	260		±15
132250122		1000		±15
132250144		2000		±15
132450100		260		±22
132450122	250-450	1000		±22
132450144		2000		±22
132900100	400-1000	440		±30
132900122		1000		±30
132900144		2000		±30
132951100		130-1500		440
BORE GAUGES SETS				
132160105	18-160		0.01	±15
132450105	18-450			±22
132990105	6-1000			±30

UP TO
2000MM
DEPTH




DIGITAL BORE GAUGES WITH CARBIDE CONTACTS

Item No	Range	Depth	Reso- lution	Accuracy	Preset	Hold
	mm	mm	mm	µm		
132010800	6-10	60	0.001	±3	•	•
132018800	10-18	110		±3	•	•
132050800	18-50	130		±3	•	•
132050811		500		±3	•	•
132050822		1000		±3	•	•
132050844		2000		±3	•	•
132160800	50-160	150		±3	•	•
132160811		500		±3	•	•
132160822		1000		±3	•	•
132160844		2000		±3	•	•
132250800	160-250	260		±5	•	•
132250822		1000		±5	•	•
132250844		2000		±5	•	•
132450800		260		±8	•	•
132450822	250-450	1000		±8	•	•
132450844		2000		±8	•	•
132900800	400-1000	440		±12	•	•
132900822		1000		±12	•	•
132900844		2000		±12	•	•
132951800		130-1500		440	±8	•
BORE GAUGES SETS						
132160805	18-160		0.001	±3	•	•
132450805	18-450			±8	•	•
132990805	6-1000			±12	•	•

- Two-point dial bore gauges with range up to 1500mm and depth up to 2 m
- Carbide tipped measuring pins
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



WIRELESS TO MDS APP
WIRELESS HID+MAC
USB HID

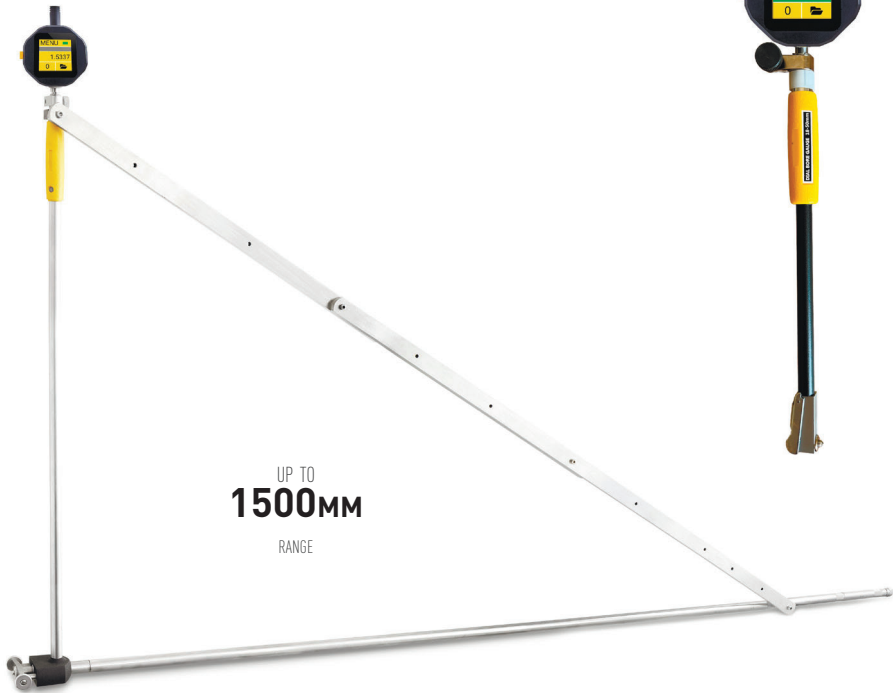

CUSTOM RANGE AND DEPTH FOR REQUEST

Item No	Range	Depth	Resolution	Accuracy	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	Display		
	mm	mm	mm	µm																
132010700	6-10	60	0.0001	±3	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update firmware	Touchscreen 1,54"		
132018700	10-18	110		±3	•	•	•	•	•	•	•	•	•	•					•	
132050700	18-50	130		±3	•	•	•	•	•	•	•	•	•	•					•	
132050711		500		±3	•	•	•	•	•	•	•	•	•	•					•	
132050722		1000		±3	•	•	•	•	•	•	•	•	•	•					•	
132050744		2000		±3	•	•	•	•	•	•	•	•	•	•					•	
132160700		50-160		150	±3	•	•	•	•	•	•	•	•	•					•	•
132160711	500			±3	•	•	•	•	•	•	•	•	•	•					•	
132160722	1000			±3	•	•	•	•	•	•	•	•	•	•					•	
132160744	2000			±3	•	•	•	•	•	•	•	•	•	•					•	
132250700	160-250			260	±5	•	•	•	•	•	•	•	•	•					•	•
132250722		1000		±5	•	•	•	•	•	•	•	•	•	•					•	
132250744		2000		±5	•	•	•	•	•	•	•	•	•	•					•	
132450700		250-450		260	±8	•	•	•	•	•	•	•	•	•					•	•
132450722				1000	±8	•	•	•	•	•	•	•	•	•					•	•
132450744	2000			±8	•	•	•	•	•	•	•	•	•	•					•	
132900700	400-1000			440	±12	•	•	•	•	•	•	•	•	•					•	•
132900722				1000	±12	•	•	•	•	•	•	•	•	•					•	•
132900744		2000		±12	•	•	•	•	•	•	•	•	•	•					•	
132951700		130-1500		440	±8	•	•	•	•	•	•	•	•	•					•	•
BORE GAUGES SETS																				
132160705	18-160		0.0001	±3	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
132450705	18-450		0.0001	±8	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
132990705	6-1000			±12	•	•	•	•	•	•	•	•	•	•	•	•	•	•		

OPTIONAL ACCESSORIES



DOWNLOAD APP



- Two-point Big depth bore gauges with Carbide contacts. Depth up to 10m with modular construction for easy transportation
- Patents UA103980, UA114974, UA149184
- Optional retractable head and support set
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



WIRELESS TO MDS APP
WIRELESS HID+MAC
USB HID

Windows Android LINUX macOS iOS


MODULAR CONSTRUCTION

MODIFICATION WITH SUPPORT SET AND RETRACTABLE HEAD

CUSTOM RANGE AND DEPTH FOR REQUEST

Item No	Range	Reso- lution	Depth	Modules		Accu- racy (Hori- zontal)	Supports set with rolls	Retractable head	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	Display	CAMERA
				length	qty																		
	mm	mm	mm	mm	pcs	µm																	
1311050745	35-50	0,0001	3000	1500	2	±12			•	•	•	•	•	•	•	•	•	•					
1311160745	50-160		3000	1500	2	±10			•	•	•	•	•	•	•	•	•	•					
1311160755	85-160		5000	1700	3	±12	option	option	•	•	•	•	•	•	•	•	•	•					
131250745	160-250		3000	1500	2	±12			•	•	•	•	•	•	•	•	•	•	•				
131250755			5000	1700	3	±15			•	•	•	•	•	•	•	•	•	•	•				
131260750	105-260			5000	1700	3	±28	•	•	•	•	•	•	•	•	•	•	•	•				
131260770			7000	1750	4	±31	•	•	•	•	•	•	•	•	•	•	•	•	•				
131260795			10000	2000	5	±35	•	•	•	•	•	•	•	•	•	•	•	•	•				
131450745	250-450			3000	1500	2	±17	option	option	•	•	•	•	•	•	•	•	•	•				
131450755			5000	1700	3	±20	option	option	•	•	•	•	•	•	•	•	•	•	•				
131450750			7000	1700	3	±30	•	•	•	•	•	•	•	•	•	•	•	•	•				
131450770			10000	1750	4	±33	•	•	•	•	•	•	•	•	•	•	•	•	•				
131450795			10000	2000	5	±37	•	•	•	•	•	•	•	•	•	•	•	•	•				
131900745	400-1000			3000	1500	2	±25	option	option	•	•	•	•	•	•	•	•	•	•				
131900755			5000	1700	3	±30	option	option	•	•	•	•	•	•	•	•	•	•	•				
131990750			7000	1700	3	±35	•	•	•	•	•	•	•	•	•	•	•	•	•				
131990770			10000	1750	4	±40	•	•	•	•	•	•	•	•	•	•	•	•	•				
131990795			10000	2000	5	±45	•	•	•	•	•	•	•	•	•	•	•	•	•				

OPTIONAL ACCESSORIES

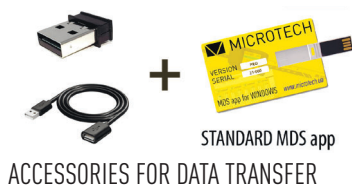

DOWNLOAD APP

