
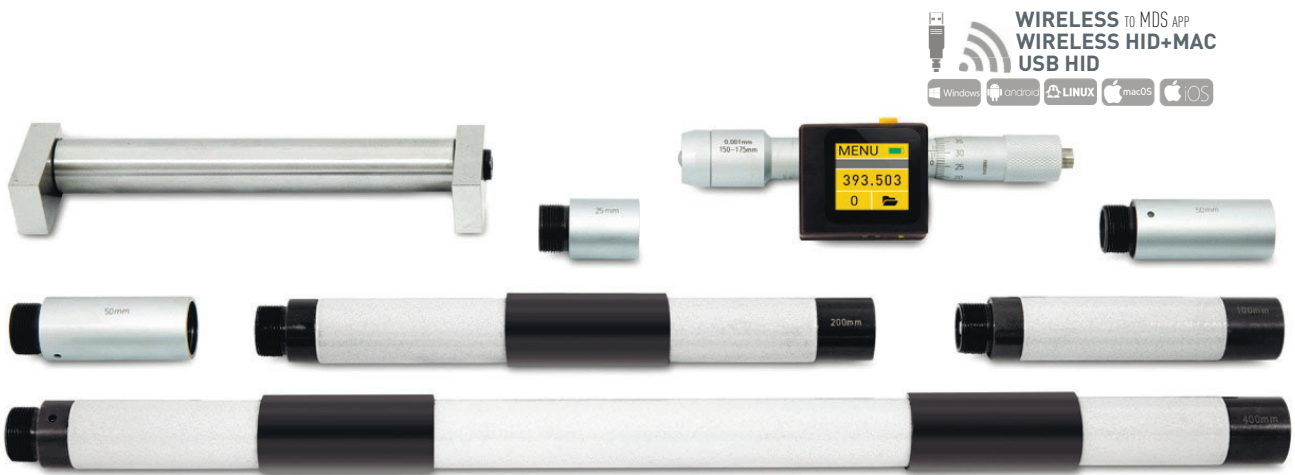


- Tubular Inside micrometers with range up to 6m
- Digital IP65 or Computerized **MICS** indication system Modification with **Long range** Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- **Calibration** certificate included (ISO17025 (Ilac MRA))



Item No	Range		Reso- lution	Accu- racy	Tube D	Extension rods	Proof	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB	Display		
	mm	inch	mm	µm	mm	mm																
DIGITAL INSIDE MICROMETER IP65																						
133800102	125-1000	5-40"	0,001	±20	22	25, 50 (2pcs), 100, 200, 400	IP65	•														
133800152	125-1500	5-60"		±25		25, 50 (2pcs), 100 (2pcs), 200, 400 (2pcs)		•														
133800202	125-2100	5-84"		±30		25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (3pcs)		•														
133800302	125-3000	5-120"		±40	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (5pcs)	•																
133800402	125-4000	5-160"		±50	25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (8pcs)	•																
133800502	125-5000	5-200"		±70	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (10pcs)	•																
133800602	125-6000	5-240"		±80	25, 50 (2pcs), 100 (2pcs), 200 (4pcs), 400 (12pcs)	•																
SUB-MICRON COMPUTERIZED TUBULAR INSIDE MICROMETER IP65																						
133800100	125-1000	5-40"	0,0001	±15	22	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (10pcs)	IP65	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update	Touchscreen 1.54"	
133800150	125-1500	5-60"		±15		25, 50 (2pcs), 100 (2pcs), 200 (4pcs), 400 (12pcs)		•	•	•	•	•	•	•	•	•	•					•
133800200	125-2100	5-84"		±20		25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (3pcs)		•	•	•	•	•	•	•	•	•	•					•
133800300	125-3000	5-120"		±30	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (5pcs)	•		•	•	•	•	•	•	•	•	•	•					
133800400	125-4000	5-160"		±40	25, 50 (2pcs), 100 (2pcs), 200 (2pcs), 400 (8pcs)	•		•	•	•	•	•	•	•	•	•	•					
133800500	125-5000	5-200"		±50	25, 50 (2pcs), 100 (2pcs), 200 (3pcs), 400 (10pcs)	•		•	•	•	•	•	•	•	•	•	•					
133800600	125-6000	5-240"		±60	25, 50 (2pcs), 100 (2pcs), 200 (4pcs), 400 (12pcs)	•		•	•	•	•	•	•	•	•	•	•					