


- Long jaw digital caliper with waterproof IP67 Swiss electronics with PRESET function
- Optional Force control module 3-15N
- MODIFICATION with **3 MODES DATA TRANSFER**: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC
- Calibration certificate included (ISO17025 (Ilac MRA))



**SWISS ELECTRONICS**  
**IP67**


OPTIONAL WIRELESS TO MDS APP WIRELESS HID+MAC

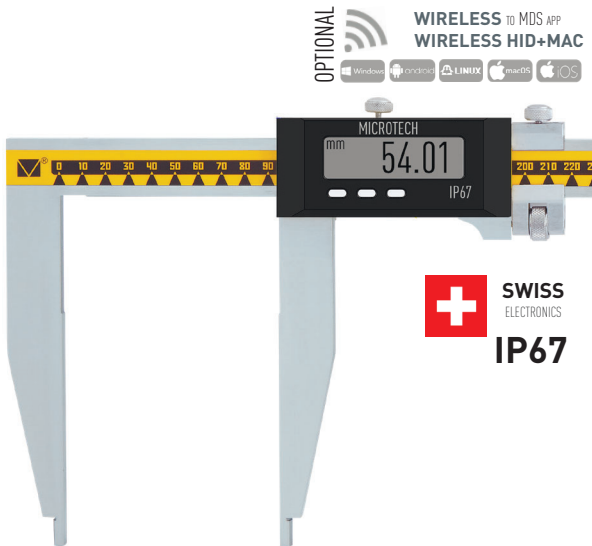

**SWISS ELECTRONICS**  
**IP67**

OPTIONAL WIRELESS TO MDS APP WIRELESS HID+MAC

**OPTIONAL ACCESSORIES**

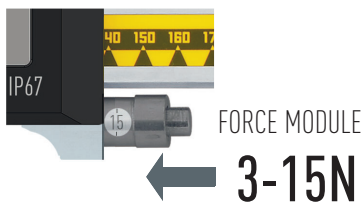

**iOT MDS CONNECT DISPLAY UNIT**  
USB, WI-FI, RJ-45, RS-485, LoRA OUTPUT

**DOWNLOAD APP**



Item No	Range		Resol	Jaw	Accur.	Bar section	Weight	Protection	mm/inch	Preset	ABS	WIRELESS		
	mm	inch											mm	mm
<b>MICRON LONG JAW DIGITAL CALIPER IP67</b>														
141073301	0-300	0-12"	0,001	100	±15	23x6	1.11	IP67	•	•	•	•		
141073501	0-500	0-20"		150	±20		1.45		•	•	•	•		
141073502	0-600	0-24"		100	±20		1.75		•	•	•	•		
141073601	0-600	0-24"		100	±20	1.66	•		•	•	•			
141073702	0-1000	0-40"		150	±30	32x7	3.32		•	•	•	•		
<b>LONG JAW DIGITAL CALIPER IP67</b>														
141072311	0-300	0-12"	0,01	100	±30	17x5	0.69	IP67	•	•	•	•		
141072411	0-400	0-16"		100	±30	17x5	0.79		•	•	•	•		
141072511	0-500	0-20"		100	±30	17x5	0.88		•	•	•	•		
141073512	0-500	0-20"		150	±30	23x6	1.75	IP67	•	•	•	•		
141073515	0-500	0-20"		300	±40		2.65		•	•	•	•		
141073611	0-600	0-24"		100	±30	32x7	1.66		At case	•	•	•	•	
141073712	0-1000	0-40"		150	±40		3.32			•	•	•	•	
141073715	0-1000	0-40"		300	±60	5.70	•			•	•	•		
141073812	0-1500	0-60"		150	±50	42x8				At case	•	•	•	•
141073815	0-1500	0-60"		300	±70						•	•	•	•
141073912	0-2000	0-80"	150	±60			•				•	•	•	
141073915	0-2000	0-80"		±80		•	•				•	•		
141073255	0-2500	0-100'		±90		•	•				•	•		
141073305	0-3000	0-120'	300	±100	53x8		At case	•			•	•	•	
141073405	0-4000	0-160'		±130				•			•	•	•	
141073505	0-5000	0-200'		±160				•	•		•	•		
<b>MICRON LONG JAW WIRELESS CALIPER IP67</b>														
141073371	0-300	0-12"	0,001	100	±15	23x6		1.11	IP67		•	•	•	•
141073571	0-500	0-20"		150	±20			1.45		•	•	•	•	
141073572	0-600	0-24"		100	±20			1.75		•	•	•	•	
141073671	0-600	0-24"		100	±20	1.66		•		•	•	•		
141073772	0-1000	0-40"		150	±30	32x7		3.32		•	•	•	•	
<b>LONG JAW WIRELESS CALIPER IP67</b>														
141072391	0-300	0-12"	0,01	100	±30	17x5	0.69	IP67	•	•	•	•		
141072491	0-400	0-16"		100	±30	17x5	0.79		•	•	•	•		
141072591	0-500	0-20"		100	±30	17x5	0.88		•	•	•	•		
141073592	0-500	0-20"		150	±30	23x6	1.75	IP67	•	•	•	•		
141073595	0-500	0-20"		300	±40		2.65		•	•	•	•		
141073691	0-600	0-24"		100	±30	32x7	1.66		At case	•	•	•	•	
141073792	0-1000	0-40"		150	±40		3.32			•	•	•	•	
141073795	0-1000	0-40"		300	±60	5.70	•			•	•	•		
141073892	0-1500	0-60"		150	±50	42x8				At case	•	•	•	•
141073895	0-1500	0-60"		300	±70						•	•	•	•
141073992	0-2000	0-80"	150	±60			•				•	•	•	
141073995	0-2000	0-80"		±80		•	•				•	•		
141073265	0-2500	0-100'		±90		•	•				•	•		
141073315	0-3000	0-120'	300	±100	53x8		At case	•			•	•	•	
141073415	0-4000	0-160'		±130				•			•	•	•	
141073515	0-5000	0-200'		±160				•	•		•	•		

WIRELESS to app / WIRELESS HID + MAC



- Extra Long jaw digital caliper with waterproof **IP67** Swiss electronics in Al case
- Jaw length up to 1000mm
- Aluminium construction with precision linear guides
- **Calibration** certificate included (ISO17025 (Ilac MRA))



**CUSTOM RANGE AND JAWS FOR REQUEST**

Item No	Range		Resol.	Jaws	Accuracy	Weight	Protection	mm/inch	Preset	ABS	Display
	mm	inch									
142408445	0-800	0-32"	0,001	400	±25	3,9	IP67	•	•	•	Big screen Swiss electronics IP67 in Al case
142408444			0,01		±30	3,9		•	•	•	
142411445	0-1000	0-40"	0,001	400	±30	4,3		•	•	•	
142411444			0,01		±40	4,3		•	•	•	
142411464				600	±50	4,7		•	•	•	
142418445			0-1800		0-60"	0,001		400	±40	6,2	
142418444	600	±50		6,2		•			•	•	
142418464		600		±60		6,6		•	•	•	
142120144	0-2000			0-80"		0,01		400	±60	17,5	
142120164		600	±85		18,0			•	•	•	
142120104		1000	±120		19,0			•	•	•	
142125144		400	±90		20,0			•	•	•	
142125164	0-2500	0-100"	0,01	600	±105	20,5	Al case	•	•	•	
142125104				1000	±140	21,5		•	•	•	
142130144	0-3000	0-120"	0,01	400	±100	24,0		•	•	•	
142130164				600	±110	24,5		•	•	•	
142130104				1000	±160	25,5		•	•	•	
142135144				400	±120	26,5		•	•	•	
142135164	0-3500	0-140"	0,01	600	±160	27,0		•	•	•	
142135104				1000	±240	28,0		•	•	•	

### OPTIONAL ACCESSORIES

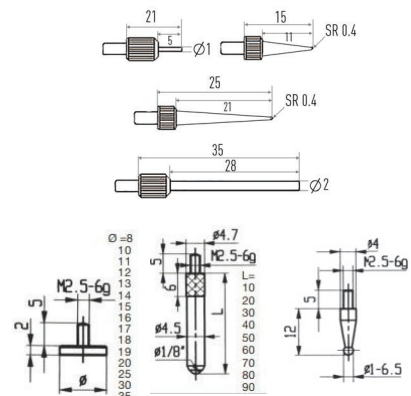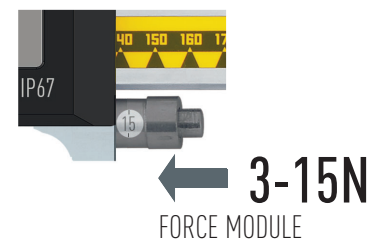

OPTIONAL ANVILS