



- Industry 4.0 adopted sub-micron Thread micrometer with computerized MICS system with 2.4" color Touchscreen
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Interchangeable anvils SET includes (Metric 60 or Whitworth 55). Custom anvils for request.
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))

NON-ROTATING

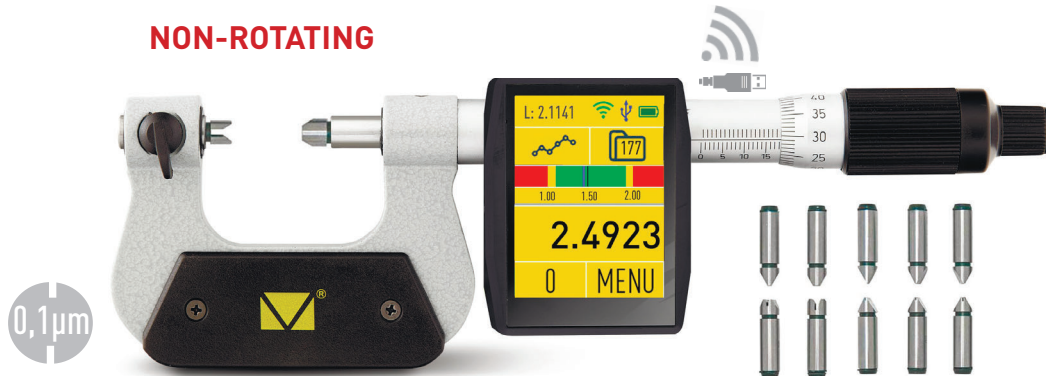

THREAD ANVILS SET & STANDARD (over 25m range) INCLUDES

Item No	Range		Resol.	Accur.	Anvils SET	Thread standard	NON-ROTATING	Analog scale	Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	2D Synchronize	Memory	WIRELESS	USB	Display		
	mm	inch																						mm	µm
THREAD COMPUTERIZED MICROMETERS WITH METRIC 60 ANVILS SET																									
110710258	0-25	0-1"	0,0001	±3	0,4-7mm 6pcs	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
110710508	25-50	1-2"		±3		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
110710758	50-75	2-3"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110711008	75-100	3-4"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110711258	100-125	4-5"		±5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110711508	125-150	5-6"		±5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110711758	150-175	6-7"		±6		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110712008	175-200	7-8"		±7		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110712258	200-225	8-9"		±7		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110712508	225-250	9-10"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110712758	250-275	10-11"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110713008	275-300	11-12"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110713258	325-350	12-13"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110713508	350-375	13-14"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110713758	250-375	14-15"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110714008	375-400	15-16"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
THREAD COMPUTERIZED MICROMETERS WITH WHITWORTH 55 ANVILS SET																									
110720258	0-25	0-1"	0,0001	±3	60-3,5 TPI 10pcs	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
110720508	25-50	1-2"		±3		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
110720758	50-75	2-3"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110721008	75-100	3-4"		±4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110721258	100-125	4-5"		±5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110721508	125-150	5-6"		±5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110721758	150-175	6-7"		±6		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110722008	175-200	7-8"		±7		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110722258	200-225	8-9"		±7		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110722508	225-250	9-10"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110722758	250-275	10-11"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110723008	275-300	11-12"		±8		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110723258	325-350	12-13"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110723508	350-375	13-14"		±9		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110723758	250-375	14-15"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110724008	375-400	15-16"		±10		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



OPTIONAL ACCESSORIES



!OT MDS CONNECT DISPLAY UNIT
USB, WI-FI, RJ-45, RS-485, LoRA OUTPUT

DOWNLOAD APP

