



- Industry 4.0 adopted E-Force caliper with computerized MICS system with hi-res 1,54" color Touchscreen
- Patents US10184772, UA174949, UA126928
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution select, Connection indication
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- E-Force control module with Force selection 1-20N, color indication, AUTO-Force mode, Force indication
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Top quality Aluminium housing (CNC machined solid block)
- Calibration certificate included (ISO17025 (Ilac MRA))

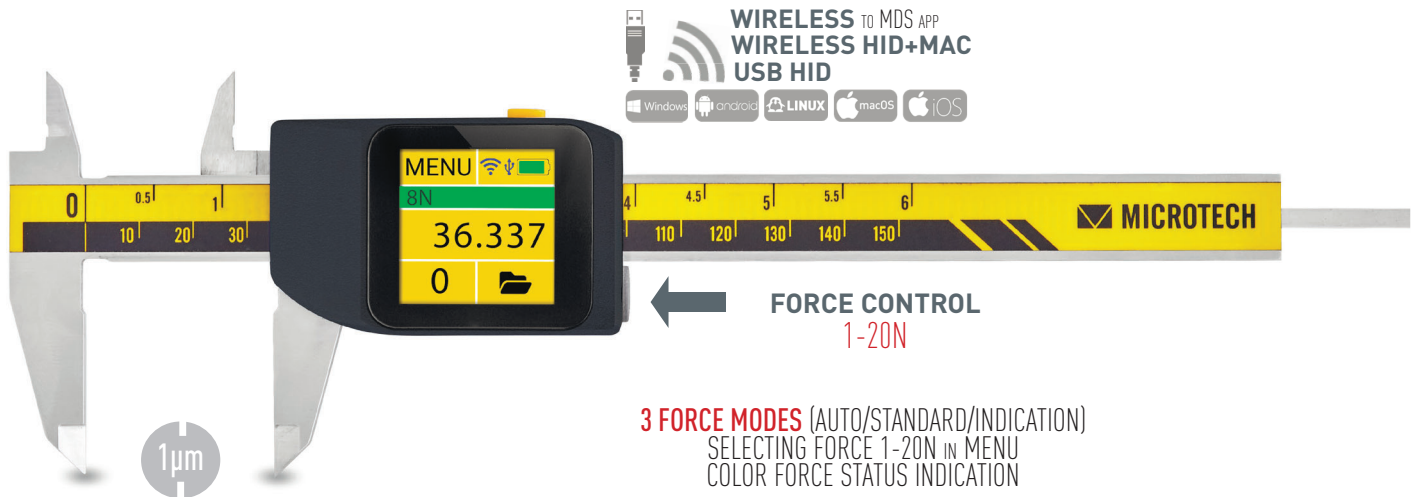

| Item No    | Range |       | Reso-<br>lution | Accu-<br>racy* | eForce | Jaws  | Carbide jaws | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr. | Calibr date | Recharge | Auto off | Password | Memory   | Folders | Statistics | WIRELESS to app | WIRELESS HID | USB HID | FW update         | Display |    |    |
|------------|-------|-------|-----------------|----------------|--------|-------|--------------|--------|---------|---------|---------|-------|-----------|--------------|-------------|----------|----------|----------|----------|---------|------------|-----------------|--------------|---------|-------------------|---------|----|----|
|            | mm    | inch  |                 |                |        |       |              |        |         |         |         |       |           |              |             |          |          |          |          |         |            |                 |              |         |                   |         | mm | µm |
| 141097015A | 0-150 | 0-6"  | 0,001           | ±5             | 1-20   | 40/16 |              | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        | 2000 val | •       | •          | •               | •            | •       | 1.54" Touchscreen |         |    |    |
| 141077015A |       |       | 0,005           | ±10            |        |       | •            | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        |          | •       | •          | •               | •            | •       |                   | •       | •  |    |
| 141077015C |       |       | •               | •              |        |       | •            | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        |          | •       | •          | •               | •            | •       |                   | •       | •  | •  |
| 141097020A | 0-200 | 0-8"  | 0,001           | ±8             | 1-20   | 50/17 |              | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        | 2000 val | •       | •          | •               | •            | •       | 1.54" Touchscreen |         |    |    |
| 141077020A |       |       | 0,005           | ±10            |        |       | •            | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        |          | •       | •          | •               | •            | •       |                   | •       | •  |    |
| 141077020C |       |       | •               | •              |        |       | •            | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        |          | •       | •          | •               | •            | •       |                   | •       | •  | •  |
| 141097030A | 0-300 | 0-12" | 0,001           | ±10            | 1-20   | 60/20 |              | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        | 2000 val | •       | •          | •               | •            | •       | 1.54" Touchscreen |         |    |    |
| 141077030A |       |       | 0,005           | ±15            |        |       | •            | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        |          | •       | •          | •               | •            | •       |                   | •       | •  | •  |
| 141077030C |       |       | •               | •              |        |       | •            | •      | •       | •       | •       | •     | •         | •            | •           | •        | •        | •        |          | •       | •          | •               | •            | •       |                   | •       | •  | •  |

\*Accuracy on external jaws. Internal jaws and Depth according ISO13385-1

**OPTIONAL ACCESSORIES**



**DOWNLOAD APP**

